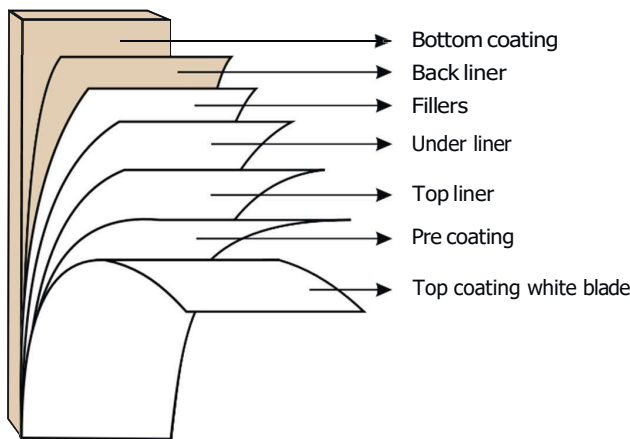


**DMS Exim**

Dmsexim.com

DMS EXIM

8 88A4, plot.no. 92/93/94 Rafal Eshwar, gidc street, 8,
national highway, Morbi, Gujarat 363641, India.
Mo./ whatsapp: +919537077277
Mail: sales@dmsexim.com

**SPECIFICATION SHEET****Luma Platinum****GSM : 285 - 450****(Craft Back Paper Board)****Application**

1. Packaging board
2. Printing job

Recommended for Multi-color printing

1. Letter press

SUBSTANCE	CALIPER	BULK	STIFFNES			PARAMETERS		
GSM	MICRONS	CC/GM	MD	CD	GM	COBB (60 SEC) T-441 (TOP)	g/m2	Max. 40
285	350	1.23	90	41	61			
296	364	1.23	105	48	71			
310	381	1.23	115	52	78	COBB (60 SEC) T-441 (BOTTOM)	g/m2	Max. 50
320	397	1.24	125	57	84			
330	409	1.24	135	61	91			
340	422	1.24	145	66	98	SMOOTHNESS (Bendtsen)	ml/min	50 - 70
350	437	1.25	155	70	105			
360	450	1.25	170	77	115			
370	466	1.26	185	84	125	PLY BOND T-833	ft.lb in 1000	Min. 80
380	479	1.26	190	86	128			
400	504	1.26	220	100	148			
450	572	1.27	300	135	201	Brightness ISO T-452	%	78 +/- 1
						GLOSS at 75' T-480	%	40 - 45
						Moisture T-412 (</-300 GSM)	%	6.0 - 7.0
Tolerance						Moisture T-412 (>300 GSM)	%	7.0 - 8.0
± 3%	± 5%	± 10%						